


# SOT-23/TSOT



## FEATURES

- ▶ Cu wire interconnect for low cost
- ▶ Standard JEDEC and EIAJ package outlines
- ▶ Turnkey test services, including strip test options
- ▶ Green materials are standard – Pb-free and RoHS compliant

## PROCESS HIGHLIGHTS

- ▶ Au plated PCC wire is standard, Au and Ag wire available
- ▶ Wafer backgrinding services available
- ▶ Optional chip-on-lead construction using film die attach material
- ▶ Matte Sn lead finish is standard
- ▶ Laser mark on package body

SOT-23 (Small Outline Transistor) and TSOT (Thin Small Outline Transistor Package) are leadframe based, plastic encapsulated packages that are well suited for applications requiring very small footprints. These industry standard packages run in very high volume and provide a cost-effective solution for a wide range of applications. Having up to 8 leads, these packages can handle small ICs that may have previously been placed in SOIC or TSSOP packages.

## Reliability Qualification

Amkor package qualification uses three independent production lots and a minimum of 77 units per test group. All testing includes JSTD-020 moisture preconditioning.

- ▶ Moisture sensitivity characterization: JEDEC level 3, 85°C/85% RH, 168 hours
- ▶ uHAST: 130°C/85% RH, no bias, 96 hours
- ▶ Temp cycle: -65°C/+150°C, 500 cycles
- ▶ High temp storage: 150°C, 1000 hours

## Services and Support

Amkor has a broad base of resources available to help customers bring quality products to market quickly and at the lowest possible cost.

- ▶ Full package characterization
- ▶ Thermal, mechanical stress and electrical performance modeling
- ▶ Turnkey assembly, test and drop-ship
- ▶ World-class reliability testing and failure analysis

## Test Services

- ▶ Program generation/conversion
- ▶ Wafer probe
- ▶ Burn-in capabilities
- ▶ -55°C to +165°C test available
- ▶ Strip test available


## Shipping Options

- ▶ Aluminum canister
- ▶ Tape and reel
- ▶ Dry pack
- ▶ Drop-ship

# SOT-23/TSOT


## Cross Sections

Die Up

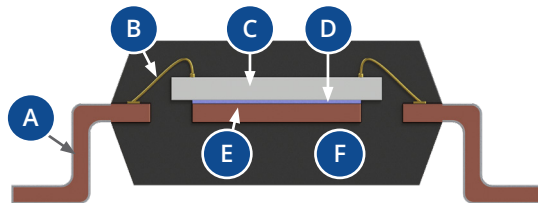

- A** Cu leadframe
- B** Wirebond
- C** Die
- D** Die attach adhesive
- E** Reduced pad
- F** Mold compound

Die Down

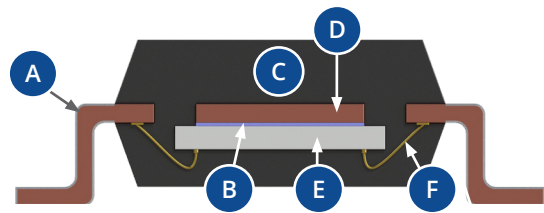

- A** Cu leadframe
- B** Die attach adhesive
- C** Mold compound
- D** Reduced pad
- E** Die
- F** Wirebond

## Configuration Options

SOT-23/TSOT Nominal Package Dimensions (mm)

Package Type	Lead Count	Body Width	Body Length	Body Thickness	Overall Height	Lead Pitch	Tip-to-Tip	JEDEC/EIAJ
SOT-23	3	1.3	2.9	0.90	0.98	0.95/1.9	2.40	SOT346/ TO-236/SC-59
	4	1.3	2.9	0.90	0.98	1.92	2.40	SOT143/ TO-253
	5	1.6	2.9	1.15	1.23	0.95/1.9	2.80	MO-178
	6	1.6	2.9	1.15	1.23	0.95	2.80	MO-178
	8	1.6	2.9	1.15	1.23	0.65	2.80	MO-178
TSOT*	3	1.6	2.9	0.88	0.96	0.95/1.9	2.75	N/A
	5	1.6	2.9	0.88	0.96	0.95	2.75	MO-193
	6	1.6	2.9	0.88	0.96	0.95	2.75	MO-193
	8	1.6	2.9	0.88	0.96	0.65	2.75	MO-193

\*TSOT may also be referenced as a TSOP

Visit [amkor.com](http://amkor.com) or email [sales@amkor.com](mailto:sales@amkor.com) for more information.



With respect to the information in this document, Amkor makes no guarantee or warranty of its accuracy or that the use of such information will not infringe upon the intellectual rights of third parties. Amkor shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon it and no patent or other license is implied hereby. This document does not in any way extend or modify Amkor's warranty on any product beyond that set forth in its standard terms and conditions of sale. Amkor reserves the right to make changes in its product and specifications at any time and without notice. The Amkor name and logo are registered trademarks of Amkor Technology, Inc. All other trademarks mentioned are property of their respective companies. © 2021 Amkor Technology, Incorporated. All Rights Reserved. DS5810-EN Rev Date: 06/21