

# DPAK (TO-252)

DPAK follows the JEDEC standard for medium-power discrete products.



## FEATURES

- ▶ Low on-resistance and high-current density due to thick Al wirebonding
- ▶ Full turnkey available from wafer saw through test and packing
- ▶ Pb-free plating

## UNDER DEVELOPMENT

- ▶ Environmentally friendly die attach Pb-free solder
- ▶ Halogen-free mold compound

## PROCESS HIGHLIGHTS

- ▶ Interconnect: Thick Al wirebonding technology
- ▶ Plating: 100% Matte Sn
- ▶ Marking: Laser mark

## Applications

DPAK is suitable for medium-power applications (reference values 80W\*/60A), designed for low on-resistance and high-speed switching MOSFETs. Ideal for:

- ▶ Motor drivers
- ▶ Power supply circuits
- ▶ DC-DC converters
- ▶ Consumer products
- ▶ Automotive products

\*T<sub>c</sub> = 25°C, T<sub>j</sub> = Max 150°C

## Reliability Qualification

Amkor packages are assembled with proven reliable semiconductor materials. All reliability testing includes:

- ▶ JEDEC standard pre-conditioning except high temperature storage
- ▶ 85°C/85% RH, 168 hours, IR reflow 260°C 3X
- ▶ H<sup>3</sup>TRB: 85°C/85% RH, 1000 hours
- ▶ uHAST: 130°C/85% RH, 96 hours
- ▶ Temp cycle: -55°C to 150°C, 1000 cycles
- ▶ High temp storage: 150°C, 1000 hours

## Test Services

Amkor offers full turnkey business for all power discrete products with the capability to test various types of power devices including MOSFETs, intelligent power devices, etc.

- ▶ Power discrete test capability
  - ▷ DC
  - ▷ Capacitance \*1
  - ▷ R<sub>g</sub> \*1
  - ▷ Avalanche test
  - ▷ Thermal resistance
- ▶ Program conversion
- ▶ Electrical failure analysis
- ▶ Integrated test, marking, vision inspection and tape & reel services

\*1 Sampling test only

# DPAK (TO-252)


## Standard Materials

- ▶ Leadframe: Copper with Ni plating on wirebonding area
- ▶ Die attach: Pb solder
- ▶ Interconnect: Al wire (11.8 mil max)
- ▶ Mold compound: With halogen

## Shipping


- ▶ Tape and reel packing
  - ▷ 2000 pcs per reel
  - ▷ Tape width: 10.7 mm
  - ▷ Reel  $\Phi$  = 330 mm
- ▶ Barcode packing label

## Cross Section

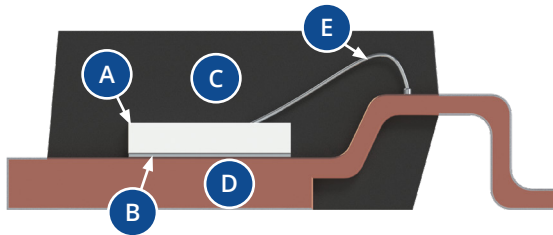


- A** Die
- B** Die attach material
- C** Mold compound
- D** Leadframe
- E** Al wire

## Package Outline Drawing

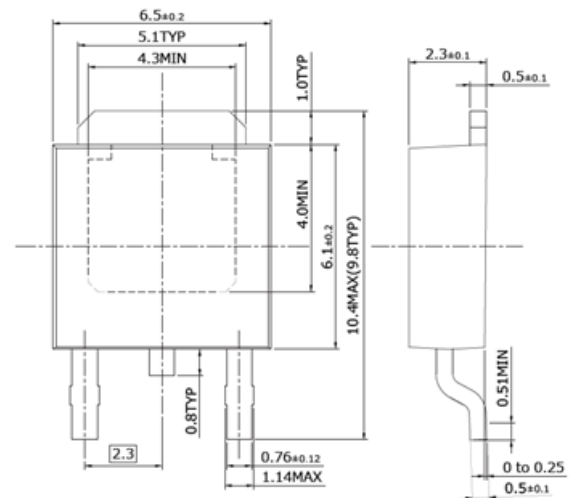

Unit: mm

## Top and Bottom View

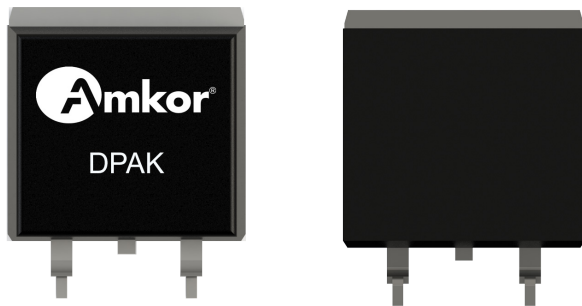

Visit [amkor.com](http://amkor.com) or email [sales@amkor.com](mailto:sales@amkor.com) for more information.

With respect to the information in this document, Amkor makes no guarantee or warranty of its accuracy or that the use of such information will not infringe upon the intellectual rights of third parties. Amkor shall not be responsible for any loss or damage of whatever nature resulting from the use of, or reliance upon it and no patent or other license is implied hereby. This document does not in any way extend or modify Amkor's warranty on any product beyond that set forth in its standard terms and conditions of sale. Amkor reserves the right to make changes in its product and specifications at any time and without notice. The Amkor name and logo are registered trademarks of Amkor Technology, Inc. All other trademarks mentioned are property of their respective companies. © 2020 Amkor Technology, Incorporated. All Rights Reserved. DS414D-EN Rev Date: 01/20

